Canon KNOW HOW™

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042, U.S.A.

Canon Canada Inc.
6390 Dixie Road, Mississauga,
Ontario L5T 1P7, Canada

Canon Mexicana, S. DE R.L. DE C.V.
Periférico Sur No. 4124, 5º y 6º pisos
Col. Ex-Rancho de Anzaldo
01900 México, D.F.

0033W398 8/02

©2002 CANON U.S.A., INC.
PRINTED IN U.S.A.

Canon

SURE SHOT 130u

Be Sure.

So Amazingly Close.

Your best friend's smile. The vast expanse of a white sandy beach. The camera's 38-130mm (f/5.6-12.5) 3.4x Zoom Lens will take you from sweeping wide-angle to intimate telephoto.

A Smarter Focus.

Capture every moment with perfect precision – automatically. The passive 3-point AIAF reads the scene at three different points for ultra-accuracy – even if your subject is off-center.

Fashionably Slender.

Here's a camera that will feel like it was made for you alone. Ultra-compact, its sculpted contours conform to your hand – perfectly. And its gleaming aluminum body radiates a style that brilliantly reflects your own.

A zoom that gets you close – really close.

Strike a pose. Capture a moment.

As Quick As You Are.

Life moves fast, and your camera should, too. With a Real Time Shutter Release that virtually eliminates shutter lag (just 0.03 seconds) you'll never miss a shot.

Absolutely Brilliant.

Low light or backlight, the built-in automatic 7-mode Light Guide Zoom Flash provides stellar results, and the Red-Eye Reduction feature keeps eyes looking bright and natural.

Create a Style.

Nobody shoots exactly like you do. So the Sure Shot 130u has five built-in Custom Functions to let you create and store your own individual settings. Now, you can do things your own way.

1	REAL TIME (RT) SHUTTER RELEASE
2	FLASH MODE MEMORY
3	AUTOMATIC FILM REWINDING
4	CENTER-POINT FOCUSING
5	CONTINUOUS SHOOTING

Focus your attention – 3 Point Smart Autofocus

To keep everything sharp as you zoom, the Sure Shot 130u switches between seven focusing points in three separate stages according to your zoom position. It's as if the camera can read your mind.

When your creative impulse wants to focus all the attention on a single subject, select Center Point AF. It gives you the greater precision you need to express your big idea. The results will amaze you and impress others. Prepare yourself for well-deserved compliments.

Exquisitely sensitive – Exposure Control

In bright light, back light or shadow – indoors or out, the ingenious 16-Zone Metering Sensor automatically calculates the right exposure for your pictures. So you'll get perfectly illuminated images, shot after shot. And all you have to do is push the button. Amazing!

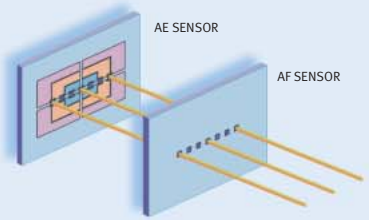

For those times your creativity demands it, there's Manual Exposure Compensation. With it, you can override the 130u's automatic settings to realize your own individual vision. For darker, moodier exposures choose the -1.5 EV setting. Or to lighten your shot, set the camera to +1.5 EV.

It's your kind of easy – Easy Operation

The Sure Shot 130u's zoom lens will take you from sweeping wide-angle to intimate telephoto in about 2.5 seconds. Simply touch the zoom button. No stress. Just great pictures every time.

Look through the Real-Image Viewfinder. You'll immediately see how its big, bright design makes it simple to compose the lively, personal pictures you'll be proud to show. For comfort, you can set the built-in Dioptric Adjustment Mechanism from -2.5 to +0.5 so you can shoot without your prescription eyeglasses. A thoughtful touch.

Sure Shot 130u Caption Model

Sometimes your pictures need the right words. So Canon also offers the Sure Shot 130u in a Caption model. It personalizes your pictures with any of five phrases – *I LOVE YOU, THANK YOU!, SEASON'S GREETING, HAPPY BIRTHDAY* and *CONGRATULATIONS* – in five languages: English, French, German, Spanish and Japanese. Or simply imprint the date and time. You decide.

Just because you're the photographer doesn't mean you have to be left out. The Sure Shot 130u Caption is compatible with the optional Remote Controller RC-5 that lets you get in the shot – without racing to beat a self-timer. So you can comfortably take the picture – from up to 16.4 feet away.

NOMENCLATURE

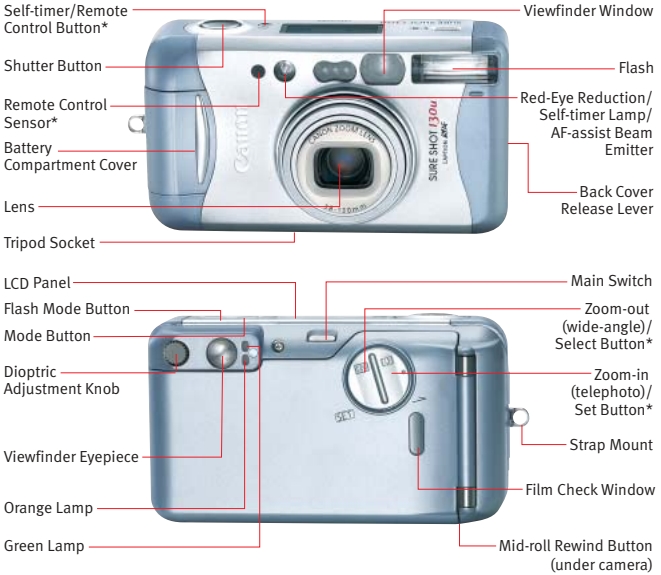

LCD PANEL

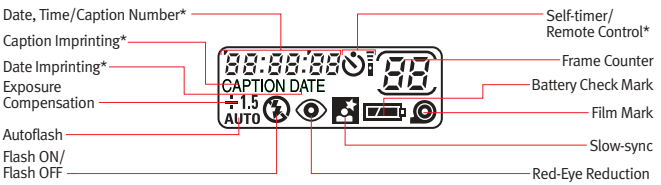

* Quartz date/caption and remote control options available only on Caption model. Remote control requires optional accessory wireless Remote Controller RC-5, sold separately.

SPECIFICATIONS

General
Type: Fully automatic 35mm lens/shutter AF camera with built-in flash and zoom lens. Quartz date functions available only on Sure Shot 130u Caption model.
Format: 24 x 36mm
Lens: 38-130mm, f/5.6-12.5, 6 elements in 6 groups.
Viewfinder: Real-image zoom viewfinder covers approx. 84% (WIDE) and 84% (TELE) of actual picture area. 0.38x magnification in WIDE; 1.3x magnification in TELE.
Viewfinder Information: Picture Frame, Close-up Frame, Wide AF Frame. Green LED Light ON: AF in focus; Blinking at 4 Hz: Subject too close; Blinking at 16 Hz: Focusing not possible. Orange LED Light ON: Flash recycling complete; Blinking at 4 Hz: Camera shake warning; OFF: Flash recycling.
Shutter: Electromagnetically controlled programmed shutter/aperture.

Autofocus
AF Modes: Passive 3-point AiAF; 3-point automatic, Center-point AF.
Focusing Range: 0.6m to infinity / 2ft. to infinity (Wide-angle), 0.75m to infinity / 2.46ft. to infinity (Telephoto).

Exposure Control
AE Control: Program AE. AE locks at AF completion.

Film Handling
Film Speed Setting: ISO 25-3200 automatically set in 1-stop increments by DX code.
Film Loading/Advance/Rewind: Fully automatic. Mid-roll rewind possible.

Flash
Autoflash: Electronically controlled autoflash based on ISO and AF distance data.
Red-Eye Reduction: Activated via Mode Button.
Flash Recycling Time: Approximately 6 seconds with new battery.
Flash Coupling Range (with ISO 400 color negative film)**:** WIDE 2-20.4ft. / 0.6-6.2m; TELE 2-13.2ft. / 0.6-4m.

Other
Self-timer: Electronically controlled with 10-second delay.
Remote Control: (Optional, requires Remote Controller RC-5) Infrared, 2-second delay shutter release up to 16.4ft. directly in front of camera and up to 11.5ft. at periphery. (Caption model only.)
Date Imprint: Built-in automatic date imprinting system programmed for 2002 to 2049. (Caption model only.)

Power Source
Battery: One 3V lithium battery (CR2))

Dimensions
Size: 4.1" (W) x 2.3" (H) x 1.8" (D) / 105mm (W) x 58.5mm (H) x 45.8mm (D)
Weight: 7.4 oz./210g

All data are based on Canon's Standard Test Method. Subject to change without notice.